Give old floors a new life

FLOOR RENEWAL PAINT SYSTEM · POWERED BY OHLAPLAST™ · PROTECTED BY SYNTEKO™

Synohla Paint Colors are a patented solution for renewing PVC and linoleum flooring.

> -"Instead of removing a worn floor and creating unnecessary waste, the existing surface can be transformed with a durable new finish"

RENEW THE FLOOR. REDUCE WASTE. TRANSFORM THE SPACE.

A responsible choice for health and the environment

Available in 6 standard colors, for both floor & wall. Custom colors can be ordered.

The system provides a safe solution for indoor environments. The finished coating contains no hazardous substances or solvents.

It meets the indoor air emission requirements for interior paints in accordance with ISO 16000-9:2024 and is non-flammable.

- Excellent adhesion and penetration into the existing surface.
- Flexible finish that follows the movement of the flooring without cracking.
- Easy-to-use, one-component floor paint.
- The paint cures when it comes into contact with PVC material. This helps prevent brushes and rollers from drying out during application, allowing tools to be stored temporarily in a sealed plastic bag between uses.
- Finished with a water-based clear coat, available in gloss or matt, for enhanced resistance to dirt, wear and everyday use.
- Decorative flakes can be added to the clear coat to create an attractive patterned finish.

Follow us at Linked In & Instagram,

https://linkedin.com/company/synohla

https://instagram.com/synohla

Watch Synohla Paint System installation!

Synohla Renewal Paint System™

PATENTED COLORS FOR RENEWING PVC & LINOLEUM

Instruction

HOW TO DO IT


INSTRUCTIONS | SYNOHLA 3P SYSTEM

PREPARE

Remove old polish and laquer by abrading the entire surface with a 3M scrubber pad.


Repair cracks and joints with our special filler.

LINOLEUM: Apply our special primer.

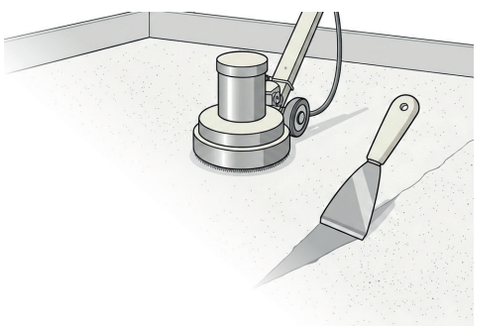


PAINT

Apply the paint with a roller at approximately 200 g/m^2. Dry overnight, minimum 4 hours.

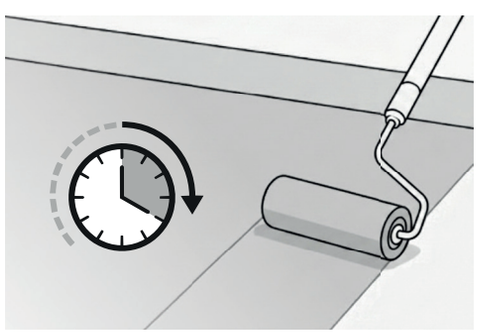

PU-COAT

Apply the PU coat with a roller at approximately 100 g/m^2. Allow to dry for at least 24 hours.

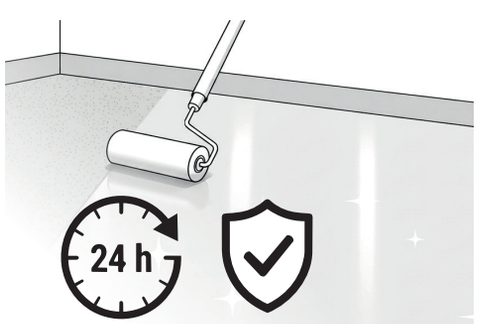

SYNOHLA IS A CO-OWNED BRAND BY

SYNTEKO.COM

OHLAPLAST.SE

SUPPORT & SALES
+46 303 172 22
sales@synohla.com
www.synohla.com

Sortiment | SYNOHLA PAINT SYSTEM™

SYNOHLA PAINT COLORS – STANDARD PAINT COLORS

Patented paint for renewing PVC and linoleum floors. 6 standard colors for both floors and walls.
Supplied in plastic tubs. Estimated consumption approx. 200 g/m^2.

LIGHT GRAY	GRAY	LIGHT BEIGE	SAND BEIGE	GREIGE	GRAY GREEN
LG51	G50	BE40	MB46	GE44	GN41
NCS S2500-N	NCS S5500-N	NCS S2010-Y10R	NCS S2010-Y30R	NCS S3005-G50Y	NCS S2005-G50Y

PACKAGING	1 kg	4 kg	10 kg
COVERAGE APPROX.	5 m^2	20 m^2	50 m^2

SPECIAL COLORS – RAL

For lines on sports floors, logos, and stencil and decorative painting. Supplied in 1 kg plastic tubs.
The color swatches are approximate – always compare with the RAL chart.

PURE ORANGE	RAPESEED YELLOW	FLAME RED	RASPBERRY RED	LIGHT BLUE	TRAFFIC WHITE	JET BLACK
RAL 2004	RAL 1021	RAL 3000	RAL 3027	RAL 5012	RAL 9016	RAL 9005

PU-LACQUER – SYNTEKO NORDIC ELASTIC

Clear lacquer supplied with hardener.
Recommended consumption 100 g of lacquer per m^2.

GLANS 5 · 20 · 45 · 90

PACKAGING

Synteko Nordic Elastic	0,9 L + 0.1 L hardener	| 1kg	| 10 m^2
Synteko Nordic Elastic	4,5 L + 0.45 L hardener	| 4,5kg	| 45 m^2

PRIMER for linoleum – SYNTEKO NORDIC ELASTIC

PACKAGING

Synteko Nordic Elastic Primer 1.0 L	| 1.0kg	| 10-15 m^2
Synteko Nordic Elastic Primer 5.0 L	| 5,0kg	| 50-75 m^2

ACCESSORIES

Pattern particles are added to the lacquer –
we recommend 2 g per 1 kg of lacquer.

- Synteko Antislip R9/R10 · 50 g plastic jar
- Filler SP266 · 300 g plastic jar
- Pattern particles S – round silverparticles · Test tube
- Pattern particles F – needle-shaped black fibers · Test tube
- Roller 10 mm, 25 cm
- Roller 10 mm, 50 cm

SYNOHLA

SUPPORT & SALES
+46 303 172 22
sales@synohla.com
www.synohla.com